



# Synergistic Strategies: Comparing Energy Performance in Climate-Adaptive Building Envelopes for Iran's Cold Semi-Arid Climate

Hanieh Gholami,\* Maryam Talaei

Department of Architecture, Faculty of Architecture and Urban Planning, Ferdowsi University of Mashhad, Mashhad, Iran

## Article info

### Article history:

Received 18 May 2024

Revised 17 June 2024

Accepted 23 June 2024

Published online 20 July 2024

### Keywords:

Energy savings

Daylight

Building shell

Climate-adaptive building envelope

## Abstract

Climate change and improving building energy performance are significant contemporary concerns. Conversely, climate-adaptive building envelopes (CABEs) offer promising solutions to enhance structural performance amidst fluctuating environmental conditions. Despite extensive research, few studies have compared the general movement strategies of climate-specific CABEs. Thus, this study examines common movement methods—Changing Opening Percentage (COP), Changing Shading Angle (CSA), Changing Fraction Axis (CFA), and Changing Pattern Geometry (CPG)—in terms of their energy and daylight performance in Mashhad, Iran's cold semi-arid climate (BSk). Simulation using LBT 1.6.1, a Grasshopper plugin in Rhinoceros, assessed Energy Usage Intensity (EUI), Spatial Daylight Autonomy (sDA), and Annual Sun Exposure (ASE). The results highlight the COP-CSA integrated model as optimal, achieving a 4-8% reduction in energy usage intensity, thus demonstrating its efficacy amid climate change.

© 2024 The Author(s). Published by solarlits.com. This is an open access article under the CC BY license (<https://creativecommons.org/licenses/by/4.0/>).

## 1. Introduction

Rapid economic development, and population growth in developing countries pose several environmental and economic challenges, such as increasing building energy consumption, and carbon dioxide emissions [1]. The building sector accounts for at least 36% of the world's total energy usage, and it's responsible for about 55% of global electricity use [2]. A significant portion of energy consumption happens during the building's operation, primarily for cooling, heating, lighting, etc [3]. The global rise in energy consumption has raised concerns about its impact on ecosystems, including ozone layer depletion, global warming, and the depletion of natural resources.

Implementing sustainable, energy-efficient measures in buildings is a key strategy in many industrialized countries to manage energy demand and costs. One effective approach is bioclimatic architecture [4], which applies climate studies to architectural design. This method enhances occupant comfort and health through low-energy techniques and sound design, aiming for energy efficiency and environmental protection. By reducing the need for heating, cooling, lighting, and ventilation, bioclimatic designs promote renewable energy use and lower energy costs, benefiting both the environment and the economy [5].

Addressing climate change and heat waves, bioclimatic design offers a systematic solution. Each bioclimatic structure is crafted on a case-by-case basis, following a clear hierarchy and leveraging its surroundings to minimize environmental impact. Bioclimatic design focuses on context-based buildings that leverage local environments and passive design, reducing the need for complex mechanical systems. While often associated with low-tech construction, it can benefit from integrating advanced technologies like Building Automation Control Systems [6]. The building's envelope is a key element in realizing this strategy.

Meanwhile, building envelope plays an essential role in improving indoor environmental quality (IEQ), and energy consumption [7]. In addition to establishing a barrier between the interior and exterior, which has a significant impact on energy consumption and the thermal and visual comfort of occupants, the building envelope also serves two primary purposes [8]. In light of the recent climate changes, contemporary facade design solutions are evolving to accommodate the evolving requirements of occupants as well as environmental conditions [9]. They can maximize the efficiency of daylight and natural ventilation in addition to reducing the heat received and the cooling load in the interior space.

Most of the building envelopes currently use fixed systems/components, such as constant level of insulation, thermal mass, and window-to-wall ratio (WWR) [10], which are incapable

\*Corresponding author.

[hanieh.gholami@alumni.um.ac.ir](mailto:hanieh.gholami@alumni.um.ac.ir) (H. Gholami)

[m.talaei@um.ac.ir](mailto:m.talaei@um.ac.ir) (M. Talaei)

### Nomenclature

|                  |                                           |
|------------------|-------------------------------------------|
| <i>CABE</i>      | <i>Climate-adaptive building envelope</i> |
| <i>WWR</i>       | <i>Window-to-wall ratio</i>               |
| <i>EUI</i>       | <i>Energy usage intensity</i>             |
| <i>sDA</i>       | <i>Spatial daylight autonomy</i>          |
| <i>ASE</i>       | <i>annual sunlight exposure</i>           |
| <i>HR</i>        | <i>horizontal</i>                         |
| <i>VR</i>        | <i>Vertical</i>                           |
| <i>DG</i>        | <i>diagonal</i>                           |
| <i>COP</i>       | <i>Changes in Opening Percentage</i>      |
| <i>CSA</i>       | <i>Changes in Shading Angel</i>           |
| <i>CPG</i>       | <i>Changes in Pattern Geometry</i>        |
| <i>OP</i>        | <i>Opening Percentage</i>                 |
| <i>AT</i>        | <i>Artificial Technology</i>              |
| <i>NE</i>        | <i>Natural Ecology</i>                    |
| <i>U &amp; E</i> | <i>Up and East</i>                        |
| <i>U &amp; W</i> | <i>Up and West</i>                        |
| <i>D &amp; E</i> | <i>Down and East</i>                      |
| <i>D &amp; W</i> | <i>Down &amp; West</i>                    |
| <i>A. N</i>      | <i>Afternoon</i>                          |
| <i>B.N</i>       | <i>Before noon</i>                        |

of providing optimum energy and visual/daylight performances of the building regarding changing ambient conditions, and give an appropriate response to environmental conditions at the same time [11].

Hence, a high-performance envelope can be defined as an exterior enclosure that uses the least possible amount of energy to maintain a comfortable interior environment leading to enhancing occupants' health and well-being [8]. It can protect a building from the summer heat, minimize heat loss during winter, utilize natural elements for heating, cooling, and lighting [12] and be an effective way to reduce building energy consumption [13].

Moreover, CABEs have received much attention in recent decades in terms of their considerable potential in adapting to fluctuating weather conditions reducing building energy consumption, and increasing the comfort features of indoor environment [14–16]. Different terms have been assigned to these systems such as dynamic[17], kinetic[18], responsive[19], active [20], smart[21], interactive [22], intelligent [23], adaptive[24], transformable[25], passive[26], and moveable [27].

Wilde and Tian (2010) indicated the important role of adaptive thermal comfort in an office building to reduce the predicted heating and cooling energy use, and overheating risk in the context of climate change. [28] Mirrahimi, et al. [29] refer to the effect of using CABE on thermal performance and indoor air temperature. Based on Loonen, et al. CABEs rather than static properties, intuitively offer opportunities for both energy savings and comfort enhancements which have a positive effect on reaching zero-energy buildings [30,31].

CABEs can be placed in different categories. Tabadkani et al. [20] categorized them based on the movement strategies, such as Moveable, Responsive, etc. Zhang et al.[32] classified them into

**Table 1.** LS specification.

| Ref  | Climate/location          | Type of adaptability                                        | Type   | Variables                                                             | Method                                               | Findings                                                                                                                                                                      | Software                     |
|------|---------------------------|-------------------------------------------------------------|--------|-----------------------------------------------------------------------|------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
| [46] | Cfb                       | Seasonal adaption of the facade                             | Office | Glazing properties<br>WWR                                             | Simulation                                           | Seasonal adaption of six façades improves IEQ parameters and energy saving by 15-18% compared to the best-performing non-adaptive façade.                                     | TRNSYS<br>Daysim             |
| [22] | Yazd, Iran (BWh)          | Transformable kinetic facade                                | Office | 2D/3D shapes of façade<br>Occupant position<br>Sun position           | Simulation                                           | It proves the high performance of the kinetic facades due to improving visual comfort. the 3D shape changes façade provides more visual comfort rather than the 2D shape.     | Rhino<br>Grasshopper<br>Diva |
| [47] | Yazd, Iran (BWh)          | Transformable kinetic façade with pattern and colored glass | Office | Different colors<br>Geometry<br>Pattern of Orosi<br>Pivot rotation    | Simulation                                           | Kinetic façades especially with colored glass ones provide a real-time adaptation of the multifunctional passive strategy to sun timing and occupants' position               | Rhino<br>Grasshopper<br>Diva |
| [17] | Singapore, (Af)           | Smart solar shading                                         | Office | Two motions<br>Different transmittance values/Axes/Dimensions         | Modeling and simulation                              | 14-21% EUI reduction<br>Folding motion is better than rotation                                                                                                                | Ladybug-<br>Honeybee         |
| [18] | Tehran (Bsk)              | Horizontal shading                                          | Office | Rotation, Spacing, distance from the building façade and sun position | Simulation and optimization<br>Sensitivity analysis  | The optimal angle is 15°<br>Improving daylight efficiency through using the proposed shading system but low-cost efficiency leads to restriction of immediate implementation. | Ladybug-<br>honeybee         |
| [48] | Ho Chi Minh, Vietnam (Aw) | Origami sun shading parameters                              | Office | Different building orientations and origami shading device            | Balancing<br>Composite Motion<br>Optimization (BCMO) | Enhancing lighting quality by using kinetic origami shading                                                                                                                   | Diva<br>Matlab<br>Rhino      |

|      |                               |                         |             |                                                                                                                                     |                                                             |                                                                                                                                                                         |                                 |
|------|-------------------------------|-------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| [36] | Mona/North Wales/ (Cfb)       | Smart/switchable window | Residential | ifferent types of advanced glazing and PDLC glazing in stat and switching mode<br>Window orientation and WWR (sensitivity analysis) | Simulation Sensitivity analysis                             | PDLC glazing has better performance with sensitivity to window orientation and WWR                                                                                      | Energy Plus                     |
| [38] | Turin, Italy (Cfa)            | Smart solar shading     | Office      | Different types of shading systems. Control strategies                                                                              | Simulation PROMETHEE II multi-criteria Sensitivity analysis | Combining the solution of exterior shadings with the most automated control strategies is the best result in terms of providing comfort, economic and energy parameters | Energy Plus                     |
| [11] | Izmir, Turkey (Mediterranean) | Pattern façade system   | Office      | Three types of pattern façade: tessellation method geometric parametric design                                                      | Modeling and simulation method                              | All the proposed facade systems provide the desired visual comfort and daylight levels at different configurations                                                      | Climate Studio in Grasshopper   |
| [19] | Istanbul, (Mediterranean)     | Origami façade shading  | Office      | Origami-based responsive façade occupant's location in the space sun's changing position in the sky                                 | Simulation and optimization                                 | Enhanced daylight level through using the origami-based responsive facade                                                                                               | Kangaroo Ladybug Climate studio |

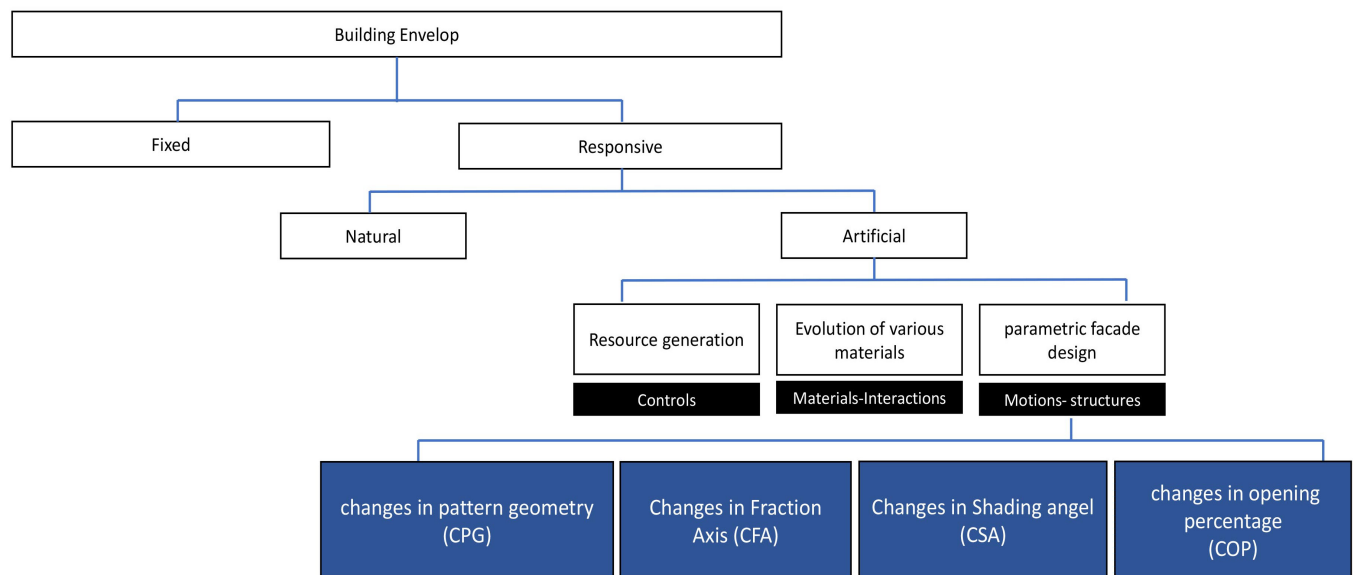


Fig. 1. CABEs classification.






two main branches: Artificial Technology (AT) and Natural Ecology (NE). AT types include: 1. Innovation in the field of parametric facade design 2. Evolution of various materials 3. Resource generation and NE types include using green facades based on positive environmental effects. In general, the CABEs can be classified based on motions, controls, interactions, and selections of materials and structures [33]. In the realm of CABE systems, the most promising ones are switchable glazing [34–36], intelligent solar shading [37,38], wall-integrated phase change materials (PCMs) [39,40], dynamic insulation [41,42], and multifunctional façade [43,44]. CABEs are further categorized according to the permutations and combinations of occupant interactions and various interactive scenarios as perceived by the occupant [45]. In recent years, different issues were measured and evaluated in this field; however, the environmental performances of different CABE system designs were not studied extensively by

previous research. Some of the latest research was compiled in Table 1.

Although CABEs have received much attention in recent years, it is still not clear which is the most suitable method for designing these facades in different climates. CABEs are classified into two main branches: Artificial Technology (AT), and Natural Ecology (NE). AT types include: 1. Innovation in the field of parametric facade design 2. Evolution of various materials 3. Resource generation and NE types include the use of green facades based on positive environmental effects [32]. In AT category, after the material topic, innovation in the field of parametric facade design is another popular topic.

Based on the studies carried out in the literature review, it is possible to classify CABE design methods into four main categories based on movement strategies (Fig. 1).

**Table 2.** Four design methods in CABEs based on movement strategies.

| Type                                | Icon                                                                               | Sample                                                                               | Ref  |
|-------------------------------------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------|
| Changes in Opening Percentage (COP) |   |   | [49] |
| Changes in Shading Angel (CSA)      |   |    | [50] |
| Changes in Fraction Axis (CFA)      |   |    | [51] |
| Changes in Pattern Geometry (CPG)   |  |  | [52] |

Façade can respond to the climate by different types of motion which are considered: 1. Changing the Opening Percentage (OP) to control the incoming light (COP) 2. Changing the Shading Angel to create a shadow effect (CSA) 3. Changing Fractures Aixs (CFA) (changing solar heat gain) 4. Changing the Pattern Geometry of the outer shell (CPG) (Table 2).

Nevertheless, within each study, a single design method for CABEs is examined in accordance with the aforementioned definitions. The effects of variables including diameters, orientations, materials, geometries, distances, and so forth, are investigated in relation to illumination parameters and energy consumption. Lack of research exists regarding the optimal movement strategies to employ during the initial phases of design. Determining the optimal initial design method can greatly reduce the time and cost to reach the desired answer. Furthermore, the present study seeks to compare different methods of CAFE design based on movement strategies due to daylight and energy performances to propose the most suitable method for an office building in Mashhad, Iran with the BSK climate. The research questions are as follows:

- which design method is more beneficial for CABEs in a city with BSK climate conditions?

- How much does each of the CAFE design methods based on the motion model affect energy consumption and daylight efficiency?
- Is it possible to achieve a more efficient movement model in CABEs by combining these Methods?

**2. Material and method**

Furthermore, to fill the knowledge gap, this research examined the effect of different CAFE design methods on daylighting criteria including sDA and ASE and energy consumption (heating, cooling, and lighting). Energy simulation used to evaluate heating and cooling loads was carried out with EnergyPlusV9-3-0, Radiance 5.4, and Daysim 4.0.0 validated by [53,54] as daylight engines, both of which are set in Ladybug tools 1.6.1 validated by [55] and [56]. Two ways of modeling (HB zone from solid and Surface by Surface) were used in the simulation (Fig. 2)

As presented in Fig. 3, In the first step, COP method was modeled with the range of 40% to 80% openings, then the best modes were selected as CAFE and inappropriate modes were omitted. Following this, a range of shading angles along the X and Y axes was incorporated into a model of the CSA method, and the

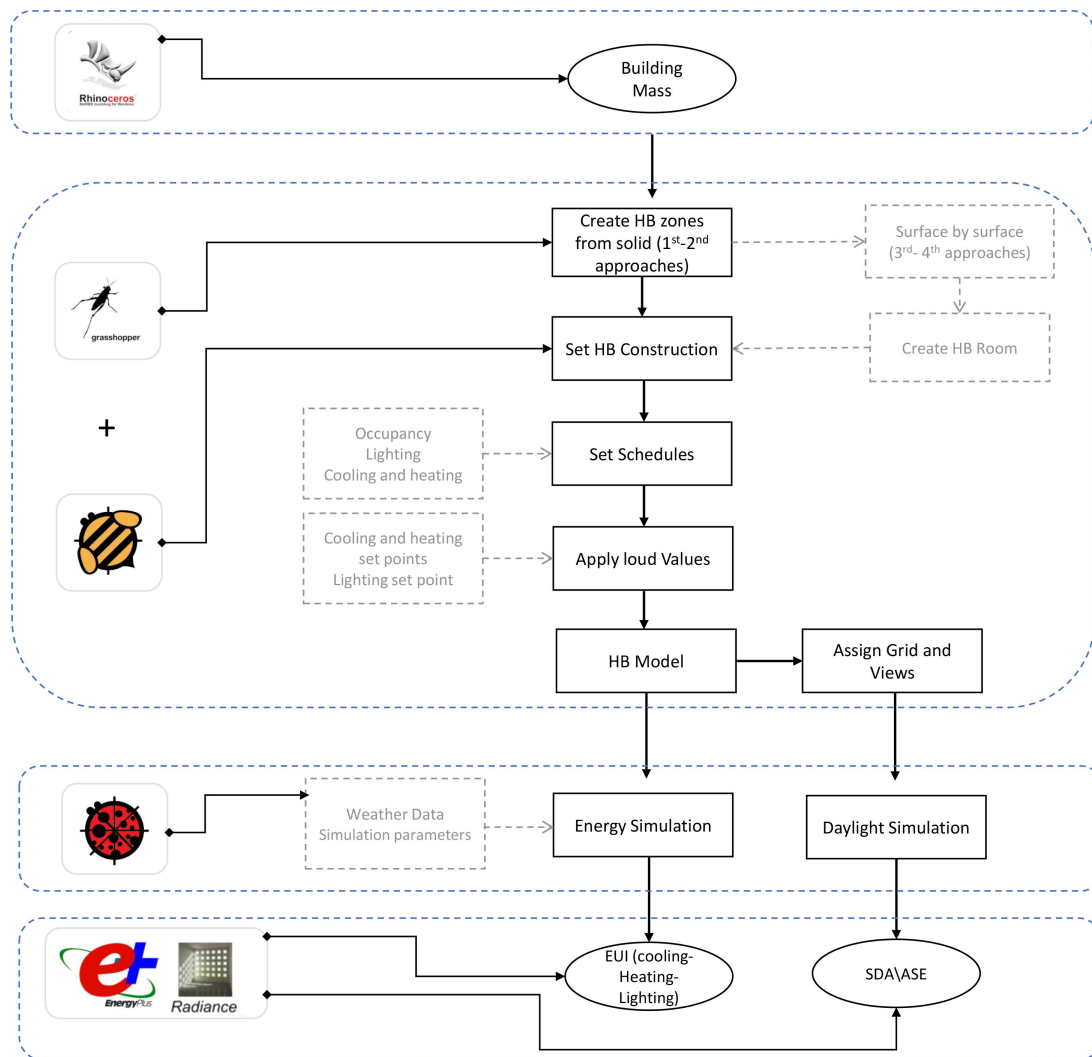


Fig. 2. Energy and daylight simulation process in LBT.

optimal results were chosen as the adaptive ones. The CFA method was assessed using a straightforward fracture facade along the X and Y axis, as illustrated in Fig. 4. The optimal mode was determined for various seasonal periods. The results of adaptive modes in the last method are considered in a suggested pattern as the fourth method.

Based on this, a proposed geometry was modeled to evaluate the method of using the geometric pattern, and the location of the opening depending on the season and time in different days and hours was modeled and investigated.

Finally, all presented methods were compared with each other and the best solution was determined.

This research helps designers and architects in the early stages of design to develop their subject based on the most efficient model and suitable method for designing energy-efficient and climate-adaptive shells.

### 3. Simulation

#### 3.1. Metric definition

Energy usage intensity (EUI), spatial Daylight Autonomy (SDA), and Annual Sun Exposure (ASE) are the metrics estimated in this paper.

EUI is a metric that defines the total energy consumption of a building which consists of cooling, heating, and lighting loads. It can be evaluated by formula (1):

$$EUI = \frac{EN_{He} + EN_{Co} + EN_{Li}}{\text{conditend floor area}} \quad (1)$$

$EN_{He}$  is the Heating load,  $EN_{Co}$  is the Cooling load, and  $EN_{Li}$  is the Interior Lighting load.

sDA is a yearly daylighting metric that describes the percentage of floor area receiving sufficient daylight during operating hours. The space should receive at least 300 lux for 50% of the annual occupied period. The sDA values between 55% and 74% indicate that daylighting in the space is nominally accepted by the user.

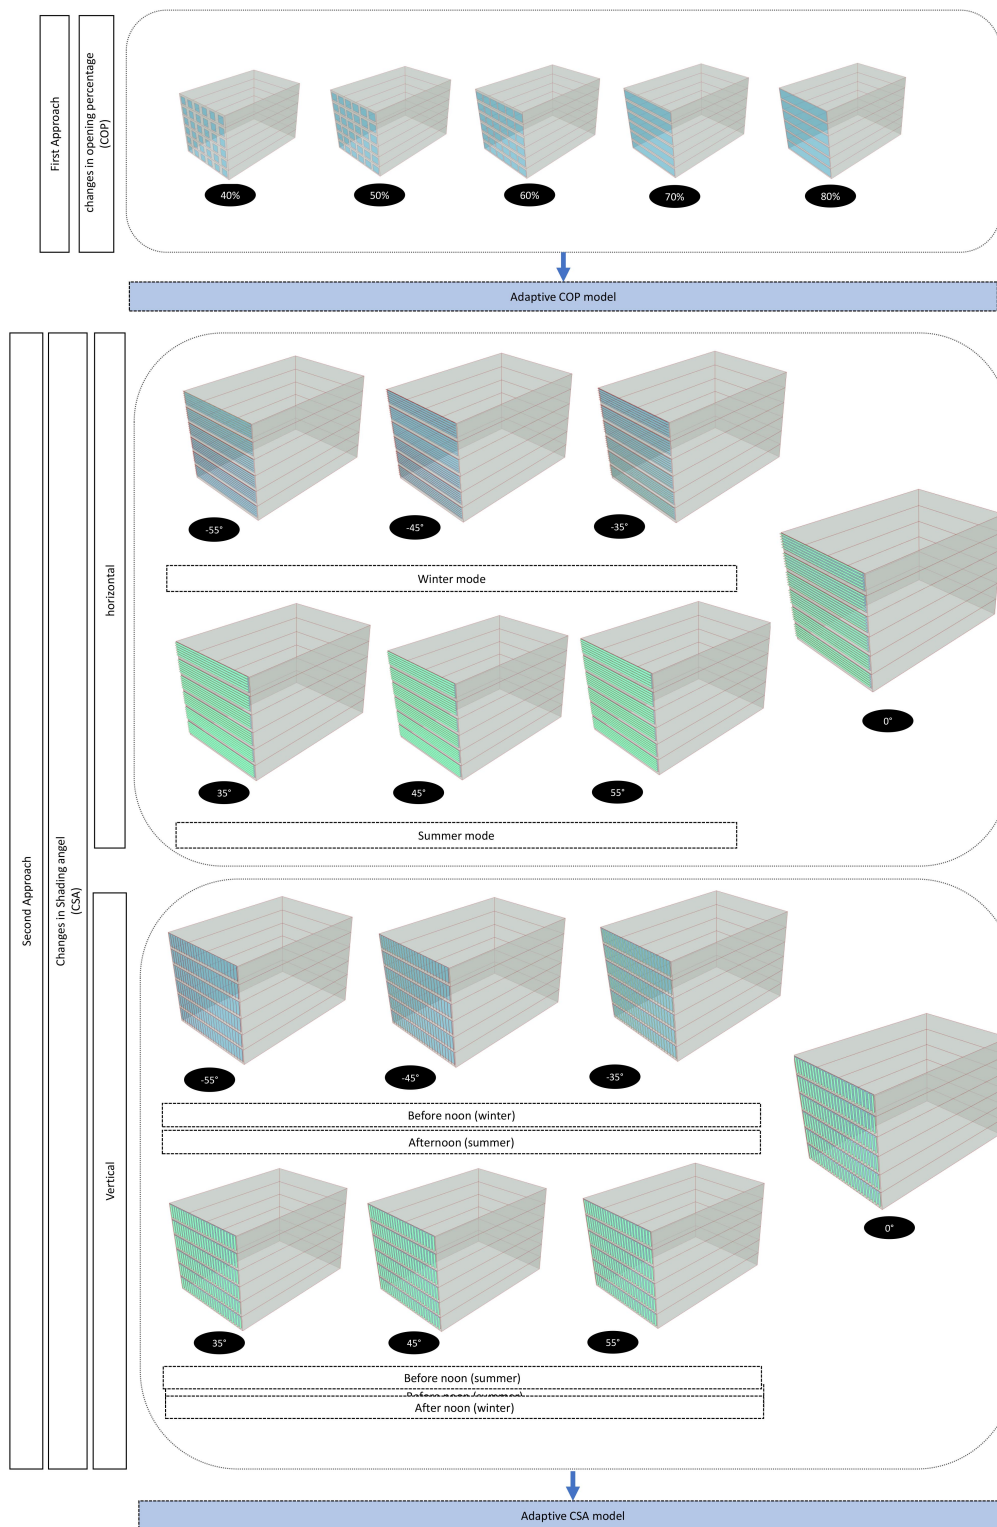


Fig. 3. 1st and 2nd method models flowchart.

However, values above 75% are defined as preferred. [57] sDA can be evaluated by the formula (2):

$$sDA = \frac{\sum_{i=1}^N ST(i)}{N} \text{ with } ST(i) = \begin{cases} 1: st_i \geq \tau t_y \\ 0: st_i < \tau t_y \end{cases} \quad (2)$$

where  $st_i$  is the occurrence count that sDA illuminance threshold at point  $i$  is surpassed, while  $ty$  is the number of annual timestamps indicating the temporal fraction threshold [58].

Increasing the quantity of natural light in the area could expose users to discomforting levels of light. The ASE metric, which

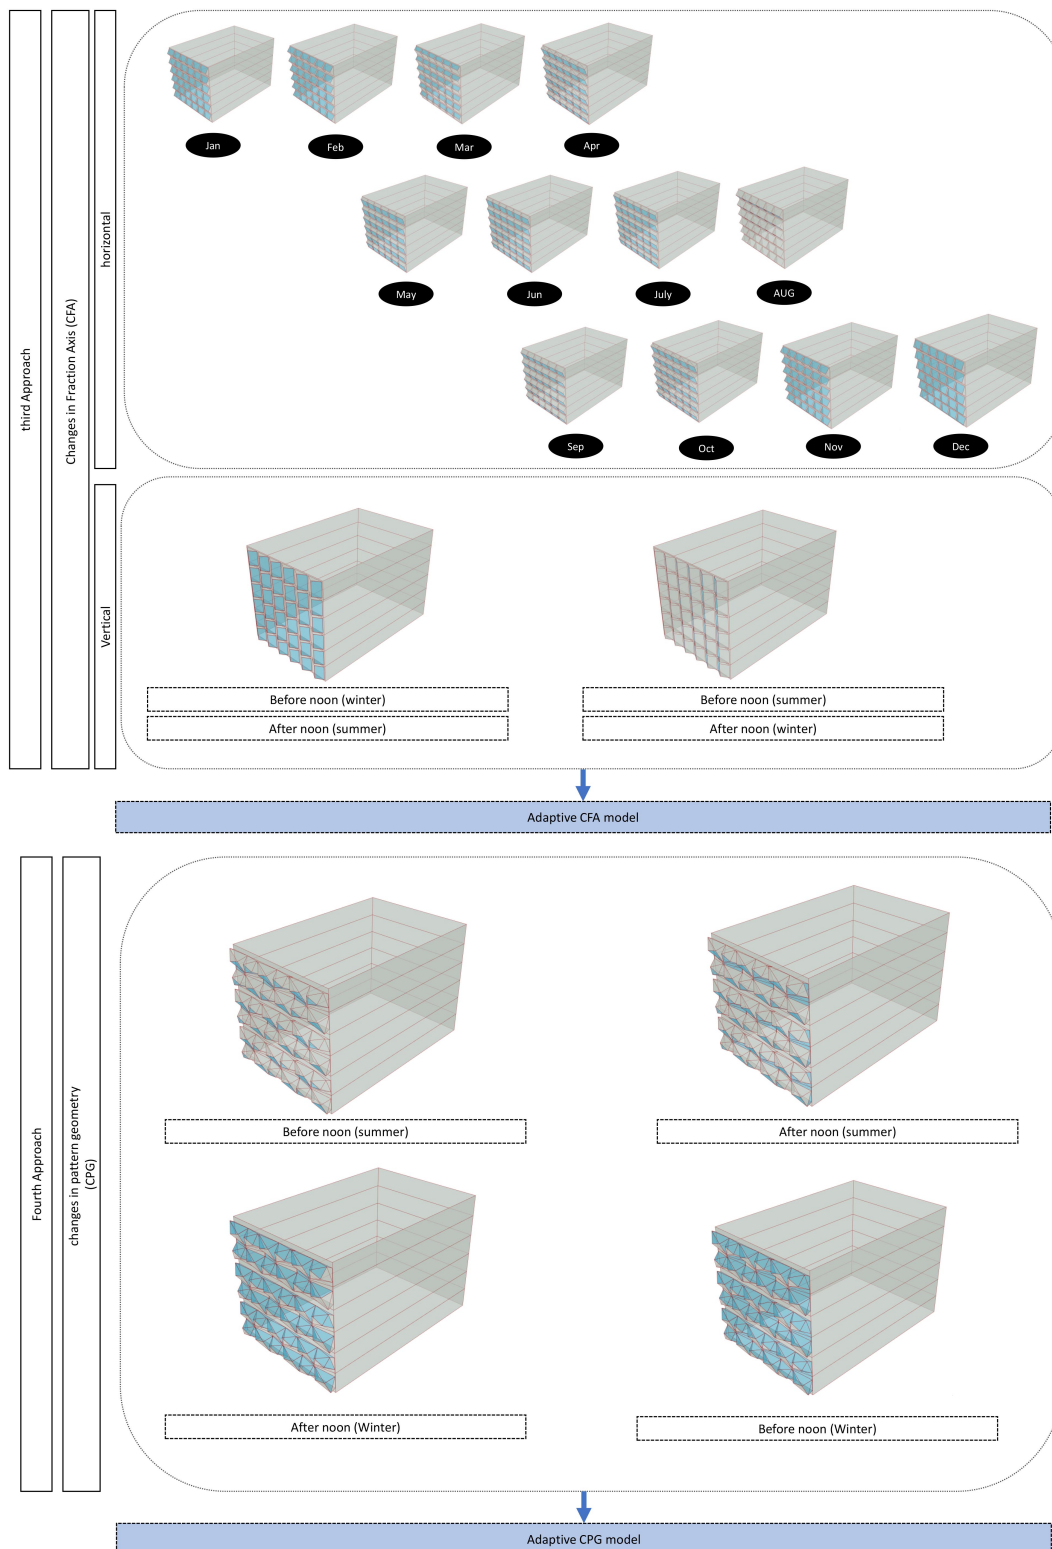


Fig. 4. 3rd and 4th method models flowchart.

focuses primarily on discomfort reduction, can be described as the principal indicator for regulating solar exposure and achieving a balanced sDA value. It measures the percentage of work plane that

exceeds the threshold of 1000 lux more than 250 occupied hours per year [59,60].

The ASE index is assessed by formula (3) [58].

**Table 3.** Different parameters of the model.

| Parameter                        |                     | Value                                    |                      |                          |
|----------------------------------|---------------------|------------------------------------------|----------------------|--------------------------|
| Location                         |                     | Mashhad, Iran<br>(36.26° N) (59.61° E)   |                      |                          |
| Orientation                      |                     | South                                    |                      |                          |
| Dimension of the sample building |                     | 28 × 18 × 3 m<br>L × W × H               |                      |                          |
| Floor numbers                    |                     | 6                                        |                      |                          |
| Materials                        |                     |                                          |                      |                          |
| factor                           | Thickness           | Conductivity                             | Density              | Heat capacity            |
| unit                             | m                   | W/m.K                                    | kg/m3                | J/kg.K                   |
| formula                          | -                   | $\sigma = -kA \frac{\Delta T}{\Delta x}$ | $\rho = \frac{m}{V}$ | $C = \frac{Q}{\Delta T}$ |
| External wall                    |                     |                                          |                      |                          |
| White concrete                   | 0.06                | 2.3                                      | 2200                 | 800                      |
| insulation                       | 0.05                | 0.035                                    | 15                   | 1000                     |
| Concrete block                   | 0.2                 | 2.3                                      | 2200                 | 800                      |
| Gypsum                           | 0.04                | 0.32                                     | 15                   | 200                      |
| Ceiling and interior floor       |                     |                                          |                      |                          |
| Concrete                         | 0.3                 | 2.25                                     | 2400                 | 880                      |
| Metal Deck                       | 0.005               | 0.84                                     | 265                  | 836                      |
| Glazing material                 |                     |                                          |                      |                          |
| Window material                  | U-Value (W/m²K)     | 1.651                                    |                      |                          |
|                                  | SHGC                | 0.387                                    |                      |                          |
|                                  | VT                  | 0.7                                      |                      |                          |
| Grid description                 |                     |                                          |                      |                          |
| Grid size                        | Distance from floor | Threshold for daylight autonomy          |                      |                          |
| 0.3 m                            | 0.8 m               | -t 00 -lt 100 -ut 3000                   |                      |                          |

**Table 4.** Energy consumption in models with different OP (kWh/m²).

| Opening percentage |     | cooling | heating | lighting | total  |
|--------------------|-----|---------|---------|----------|--------|
| 1                  | 40% | 45.173  | 6.909   | 6.906    | 58.989 |
| 2                  | 50% | 46.037  | 6.665   | 6.251    | 58.954 |
| 3                  | 60% | 47.053  | 6.471   | 5.84     | 59.365 |
| 4                  | 70% | 48.138  | 6.328   | 5.533    | 59.999 |
| 5                  | 80% | 49.273  | 6.231   | 5.306    | 60.811 |

$$ASE = \frac{\sum_{i=1}^N AT(i)}{N} \text{ with } AT(i) = \begin{cases} 1: at_i \geq T_i \\ 0: at_i \leq T_i \end{cases} \quad (3)$$

where  $a_{ti}$  is the occurrence count of exceeding ASE illuminance threshold at the point  $i$  and  $T_i$  represents the annual absolute hour threshold.

### 3.2. Model description

The base model is an office building with a surface of 2916 m² under 6 floors in Mashhad, Iran with the BSk climate. The model is oriented to the south. Based on ASHRAE standard heating setpoint is assumed 21°C and a cooling setpoint of 24°C [61].

The occupancy schedule was considered from 8:00 a.m. to 4:00 p.m. The ideal air loud was assumed for HVAC system. The grid mesh is considered to simulate lighting with a size of 30 cm, and a height of 80 cm from the floor. The daylight control setpoint is assumed 300 lux based on the paperwork space requirements

Other data used to compute the model is given in Table 3.

## 4. Results

### 4.1. The first method (COP)

#### 4.1.1. Energy simulation

By the assumption 5 different percentages (40-80%) of openings on the building surface were considered and the EUI was estimated (Table 4).

Through simulating cooling, and heating energy used in the models with different OP (Fig. 5), it was found that the sample with 40% OP had better performance in the warm seasons because of less heat gain thus reducing the cooling load of the building. 80% OP might work best in cold situations since a maximum opening would be necessary during the winter seasons when the building requires a lot of light and heat gain. Thus, limiting the amount of heat coming from the sun might be an effective strategy to lessen loads in the cooling sector. The OP is thought to be 40% during the months of June, July, August, and September (when

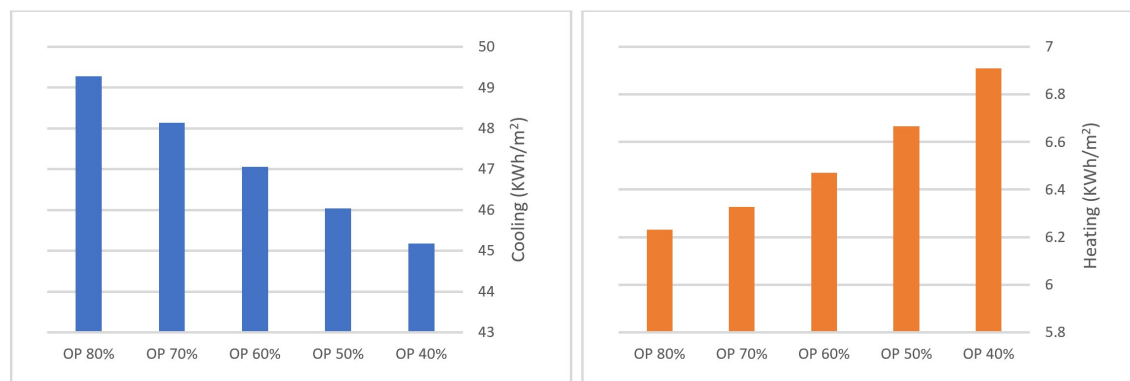


Fig. 5. The COP method cooling and heating charts.

Table 5. EUI of adaptive COP method (kWh/m²).

| Month | Cooling | Heating | lighting | Opening percentage |
|-------|---------|---------|----------|--------------------|
| Jan   | 0.001   | 1.973   | 0.466    | 80%                |
| Feb   | 0.000   | 1.550   | 0.410    |                    |
| Mar   | 0.476   | 0.344   | 0.449    | 70%                |
| Apr   | 1.479   | 0.193   | 0.512    | 50%                |
| May   | 5.638   | 0.000   | 0.657    | 40%                |
| Jun   | 9.580   | 0.000   | 0.715    |                    |
| Jul   | 10.423  | 0.000   | 0.721    |                    |
| Aug   | 9.178   | 0.000   | 0.611    |                    |
| Sep   | 6.306   | 0.001   | 0.497    |                    |
| Oct   | 2.339   | 0.006   | 0.471    | 50%                |
| Nov   | 0.072   | 0.569   | 0.479    | 70%                |
| Dec   | 0.000   | 1.593   | 0.488    | 80%                |
| Total | 45.492  | 6.229   | 6.476    | 58.196             |

Table 6. Lighting index in models with different OP.

| ASE    | sDA   | Opening percentage |
|--------|-------|--------------------|
| 27.454 | 27.45 | 40%                |
| 31.043 | 31.04 | 50%                |
| 33.937 | 33.94 | 60%                |
| 36.941 | 36.94 | 70%                |
| 39.395 | 39.40 | 80%                |
| 32.62  | 32.62 | adaptive           |

cooling demand is higher), and 80% during the colder months of December, January, and February (when heating demand is greater). To find the optimal mode for an adaptive façade, OP should be gradually changed between 40–80% as shown in Table 5.

Using this solution, energy consumption decreased by about 1.97% in comparison with (60% OP) and it reduced by 4.30% compared to the base model (80% OP).

#### 4.1.2. Daylight simulation

As seen in Table 6, using a kinetic facade method can be a satisfying response to the energy issue, as well as the use of daylight. Using the COP adaptive method (Table 7), the daylight index (sDA) has decreased by 3.88%. Although the energy consumption is generally reduced, the lighting load has increased

by 10.9%. Controlling the amount of incoming light and glare along with reducing the energy consumption can greatly affect the satisfaction of people, which can happen by intelligently changing the amount of opening [62].

#### 4.2. The second method (CSA)

Using shading devices on facades by controlling the amount of light gain can affect energy usage by changing the angle throughout the day and during the seasons.

##### 4.2.1. Energy simulation (X-axis)

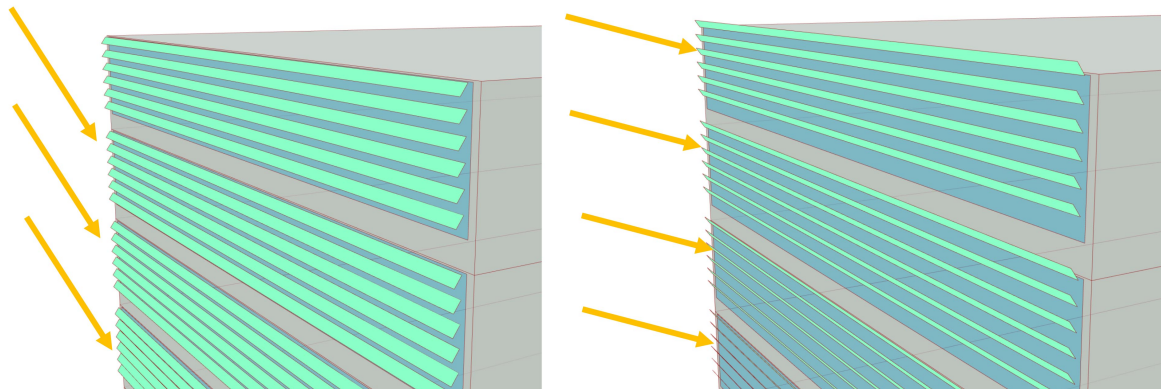
In Mashhad, during the summer revolution, the angle formed by solar radiation and the horizon line is 77 degrees, whereas during the winter revolution, it is 30 degrees. Throughout the year, this angle fluctuates between these two values; on the equinox, which

**Table 7.** Lighting in the adaptive COP method.

| Month | lighting     | Opening percentage | Month | lighting     | Opening percentage |
|-------|--------------|--------------------|-------|--------------|--------------------|
| Dec   | sDA= 39.395% | 80%                | Apr   | sDA= 31.043% | 50%                |
| Jan   | ASE=17.47%   |                    | Oct   | ASE= 13.86%  |                    |
| Feb   |              |                    |       |              |                    |
|       |              |                    |       |              |                    |
| Mar   | sDA= 36.941% | 70%                | May   | sDA= 27.454% | 40%                |
| Nov   | ASE= 15.75%  |                    | Jun   | ASE=12.75%   |                    |
|       |              |                    | Jul   |              |                    |
|       |              |                    | Aug   |              |                    |
|       |              |                    | Sep   |              |                    |

**Table 8.** Shading characteristics.

|                                    |        |
|------------------------------------|--------|
| Shading depth                      | 0.25 m |
| Shading count in each window frame | 6      |
| Offset from facade                 | 0.1 m  |
| reflect                            | 0.7    |
| spec                               | 0.9    |
| rough                              | 0.1    |
| WWR                                | 80%    |

**Fig. 6.** (left) Summer mode - (right) winter mode.**Table 9.** EUI of different CSA(HR) (kWh/m<sup>2</sup>).

|      | cooling | heating | lighting | total  |
|------|---------|---------|----------|--------|
| -55° | 44.497  | 7.635   | 8.033    | 60.165 |
| -45° | 44.011  | 7.227   | 7.648    | 58.887 |
| -35° | 43.494  | 6.919   | 7.308    | 57.722 |
| 0°   | 42.63   | 8.108   | 6.115    | 56.854 |
| 35°  | 42.826  | 9.569   | 6.956    | 59.352 |
| 45°  | 43.088  | 9.844   | 7.51     | 60.443 |
| 55 ° | 43.289  | 9.997   | 8.009    | 61.275 |

marks the beginning of spring and autumn, it hits 54 degrees. The maximum level was set at 80% OP to bring much light into the space, by helping a shading device to reduce EUI and increase daylight efficiency. The features of the shading device are shown in Table 8.

Considering different angles for the shading device of outer shell, when the angle between the shading and the horizon line increases, the cooling is reduced, and the heating is increased.

(Table 9) So, by examining the different angles of shading on the facade, two general modes for the facade were defined as follows: **Summer Mode:** In the seasons with cooling demand, more shading, and preventing the solar heat from arriving is a priority, so shading devices are downward and light indirectly enters space.

**Winter mode:** In seasons with high heat demand, interior space needs more heat gain with the upward shading panels with less shadow and direct light entering the space (Fig. 6).

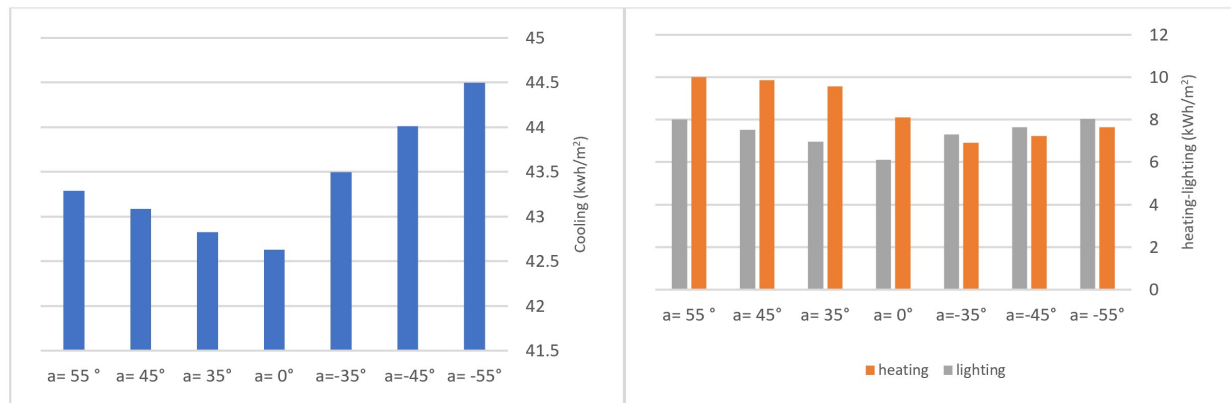


Fig. 7. CSA(HR) models energy usage.

Table 10. EUI of adaptive CSA (HR) (kWh/m²).

| Month | Cooling | Heating | lighting | Angle     |
|-------|---------|---------|----------|-----------|
| Jan   | 0.000   | 2.217   | 0.555    | -35°(HR)  |
| Feb   | 0.000   | 1.649   | 0.489    |           |
| Mar   | 0.292   | 0.531   | 0.500    | 0° (HR)   |
| Apr   | 1.244   | 0.270   | 0.584    | 35° (HR)  |
| May   | 5.380   | 0.000   | 0.535    | 0° (HR)   |
| Jun   | 9.322   | 0.000   | 0.552    |           |
| Jul   | 10.143  | 0.000   | 0.570    |           |
| Aug   | 8.738   | 0.000   | 0.532    |           |
| Sep   | 5.646   | 0.002   | 0.473    |           |
| Oct   | 1.570   | 0.017   | 0.521    | 35° (HR)  |
| Nov   | 0.042   | 0.759   | 0.504    | 0° (HR)   |
| Dec   | 0.000   | 1.797   | 0.587    | -35° (HR) |
| Total | 42.377  | 7.243   | 6.403    | 56.023    |

When a shading device is in summer mode, its angle can be changed from 0° (parallel to the horizon line) to 55°, which gradually increases heating and decreases cooling (Fig. 7). These numbers indicate that using this range during the warm seasons should be regarded as summer mode; conversely, when the movement direction changes, the heating rate decreases and the cooling load increases, making this range appropriate for cold conditions in Mashhad.

In total, using this method, compared to a base model (no shading-WWR80%), the cooling will be reduced by 14%, the heating will increase by 16.2%, and the lighting by 20.67%; overall energy consumption will decrease by 7.9%. According to climate changes, the consumption of cooling energy in Mashhad is higher than its heating load. Therefore, reducing the amount of cooling rate concerning its higher cost is necessary and it's possible to reduce the heating load by using the proper solutions. Table 10 shows the adaptive horizontal CSA model usage. Figure 8 shows the comparison between the base model and the adaptive CSA(HR).

#### 4.2.2. Daylight simulation (X-axis)

In the optimal mode with the shading system for summers, the sDA has improved by 26%, while the glare decreased by 25.7% (Table 11). During the winter season, the spatial daylight

autonomy (sDA) declined by 3.8%, while the glare index increased by 18.9%. Utilizing an 80% aperture and operating on the second shell is a more suitable approach for managing Energy Use Intensity (EUI) and maximizing natural sunshine. In Fig. 9, the daylight is compared in both winter and summer conditions, which in the second case brings more light and less glare into the space by controlling the shadow systems.

#### 4.2.3. Energy simulation (Y-axis)

Changing the angle of shading devices around x-axis based on responding to the seasonal variations of the sun and changing the angle of these elements around the y-axis is implemented to respond to the movement of the sun within a day. The results of this research are presented in Table 12.

A vertical shade positioned at 0° angle has superior performance compared to other angles in terms of cooling, heating, and lighting, as seen in Fig. 10. This particular hue may only be used in a permanent manner. However, in this particular instance, the Energy Use Intensity (EUI) is measured at 58.085 kWh/m², which is 4.48% lower than the EUI of the basic model. The performance of horizontal shades is better in reducing the cooling and heating (Fig. 11), but they have different performances in terms of lighting. In general, the amount of energy consumption will be reduced by about 4% while using horizontal kinetic shades.

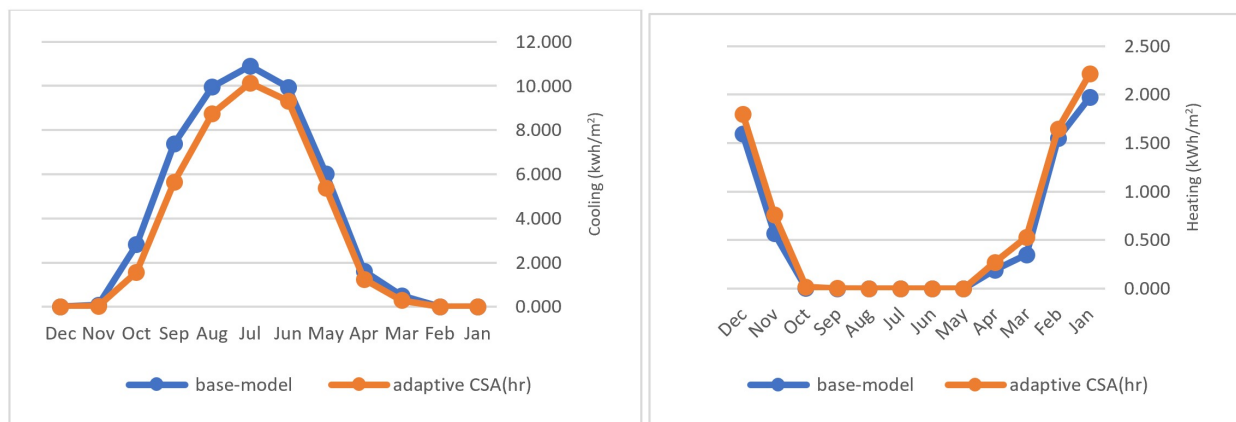


Fig. 8. The cooling and heating load in adaptive CSA (HR) and the base model.

Table 11. Lighting in 1st and 2nd methods.

| Mode   | Type          | sDA     | ASE    |
|--------|---------------|---------|--------|
| Summer | 0° (CSA) hr   | 34.652% | 9.47%  |
|        | 40% (COP)     | 27.454% | 12.75% |
| Winter | -35° (CSA) hr | 37.894% | 14.16% |
|        | 80% (COP)     | 39.395% | 17.47% |

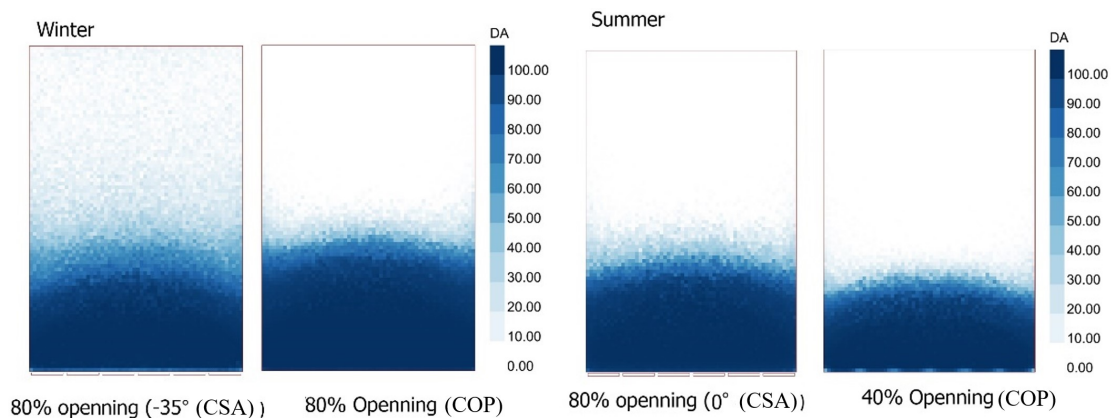


Fig. 9. Daylight comparison in adaptive models of COP & CSA (HR).

Table 12. EUI of CSA (vr) (kWh/m²).

|      | cooling | heating | lighting | Total  |
|------|---------|---------|----------|--------|
| -55° | 44.919  | 7.922   | 7.315    | 60.157 |
| -45° | 44.818  | 7.751   | 7.035    | 59.605 |
| -35° | 44.646  | 7.669   | 6.674    | 58.99  |
| 0°   | 44.484  | 7.547   | 6.055    | 58.085 |
| 35°  | 44.482  | 7.782   | 6.745    | 59.009 |
| 45 ° | 44.669  | 7.879   | 7.141    | 59.689 |
| 55 ° | 44.719  | 8.091   | 7.423    | 60.234 |

#### 4.2.4. Daylight simulation (Y-axis)

Based on Fig. 12, sDA will be 34.01% and ASE 13.68%, in comparison with 80% OP with no shading sDA=39.395 and ASE=17.47%. with this solution sDA is reduced by 13.66% and the glare impact is decreased by 21.69%.

#### 4.3. The third method (CFA)

Direct sunlight penetrating space is one of the most crucial methods for regulating solar heating, and its efficient application would be extremely practical. In this instance, the failure modes of a single-layer building shell were analyzed in both the upward and downward directions during the summer and winter seasons.

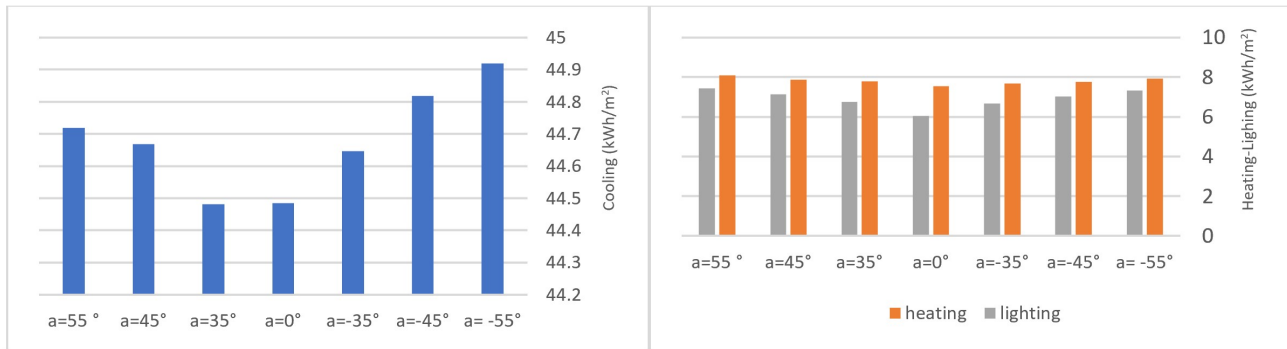


Fig. 10. Energy consumption in CSA (vr) method models.

#### 4.3.1. Energy simulation (X-axis)

We achieved following results for the expansion in winter and summer conditions:

**Winter Mode:** The openings are placed on the Upper side so lights get into the space directly.

**Summer Mode:** Lower openings that bring indirect light into space are opened and upper openings will be closed (Fig. 13).

Energy consumption was simulated and calculated for each opening shape in the desired month and the optimal model was extracted based on Table 13.

Using this strategy total energy consumption and cooling load are reduced by 3.23% and 9.82%, while the heating load and daylight are increased by 12.77% and 39.13%, respectively. In Fig. 14 the comparison between the adaptive CFA model and the base model is shown.

#### 4.3.2. Daylight simulation (X-axis)

Based on Tables 11 and 14, using daylight in three methods can be compared. Using horizontal shading in the summer season has a better effect on the light efficiency, and the first and third ones have similar performance. In summer, two methods of CSA and CFA have a better performance in ASE than 40% OP without shading.

In winter, the sDA coefficient in the first method with 80% OP without shading has better performance, but the ASE is also higher, and the third solution with a lower ASE coefficient performs better.

#### 4.3.3. Energy simulation (Y-axis)

Two states can be defined based on the sun's path in a day. From the beginning of the day to 12 was defined as B.N., and from 12 to the end of the day as A.N.

**Winter mode:** The radiant heating should be maximized, so in the B.N. the east part of the façade should be open and in the A.N. the west part should be as well.

**Summer mode:** In contrast with winter mode, radiation heat should be minimized, therefore the openings of the eastern side will be closed at B.N. and the west part in the A.N. (Fig. 15).

Using this strategy, EUI will be reduced by 1.42%, the cooling will decrease by about 8.1% but the heating will be increased by 20.18% and the lighting by 35.19% (Table 15).

So, according to this result, the performance of fraction model around the X-axis is better than the Y-axis (Fig. 16).

#### 4.4. The fourth method (CPG)

It is assumed that combining these methods in an integrated pattern geometry can reduce energy consumption. Therefore, considering the effect of fracture formation on the envelope, the 4 models are recommended, which have horizontal and vertical fractures, and the opening position will change throughout the day (hourly) and the year (monthly).

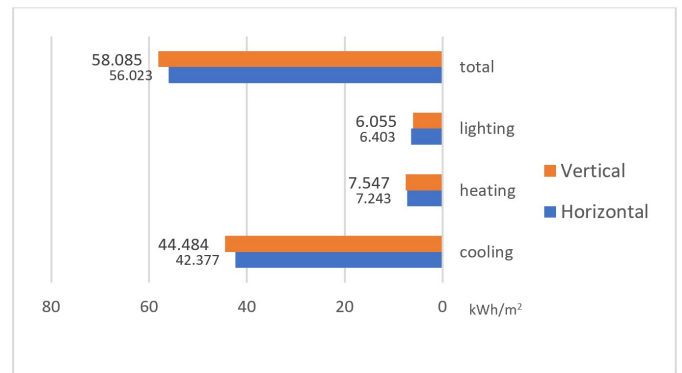


Fig. 11. Vertical and horizontal CSA models comparison in energy consumption.

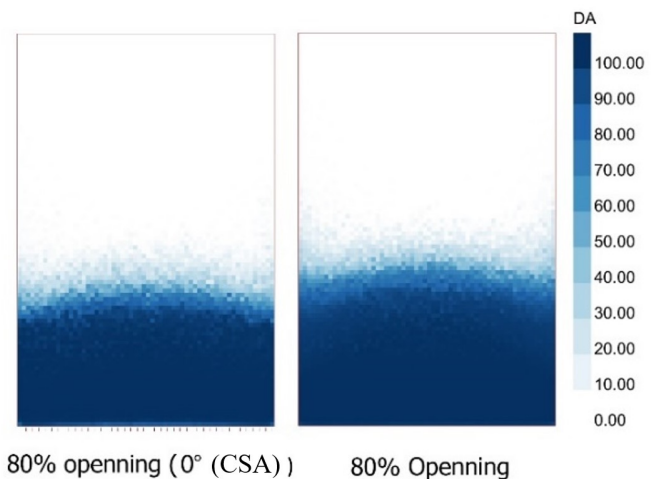


Fig. 12. Vertical shading daylight.

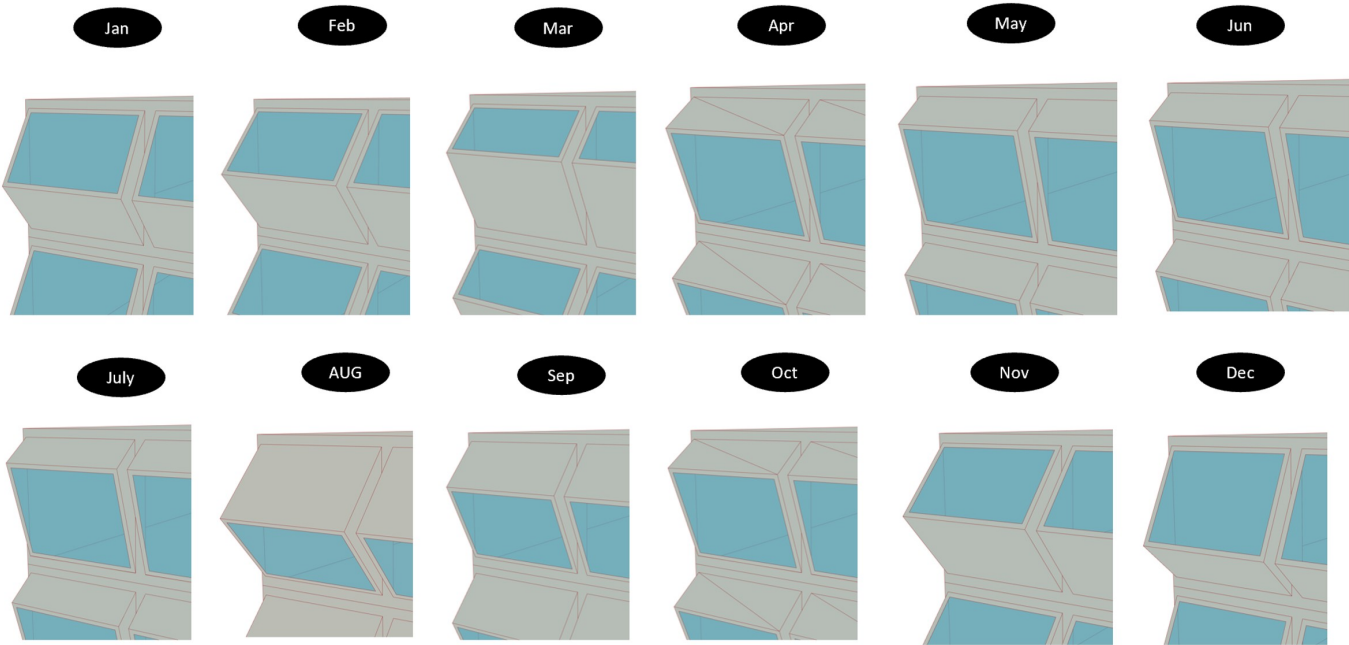


Fig. 13. Modes of openings in various months in the CFA.

Table 13. Energy consumption in adaptive CFA (X-axis) (kWh/m<sup>2</sup>).

| Month | Cooling | Heating | Lighting | Opening           |
|-------|---------|---------|----------|-------------------|
| Jan   | 0.00    | 2.28    | 0.50     | Upside (winter)   |
| Feb   | 0.00    | 1.67    | 0.44     |                   |
| Mar   | 0.39    | 0.33    | 0.50     |                   |
| Apr   | 1.30    | 0.23    | 0.70     | Downside (Summer) |
| May   | 5.51    | 0.00    | 0.64     |                   |
| Jun   | 9.60    | 0.00    | 0.65     |                   |
| Jul   | 10.46   | 0.00    | 0.69     |                   |
| Aug   | 9.09    | 0.00    | 0.94     |                   |
| Sep   | 5.86    | 0.00    | 0.77     |                   |
| Oct   | 2.01    | 0.01    | 0.54     | Upside (winter)   |
| Nov   | 0.21    | 0.72    | 0.51     |                   |
| Dec   | 0.00    | 1.79    | 0.51     |                   |
| Total | 44.44   | 7.03    | 7.38     | 58.85             |

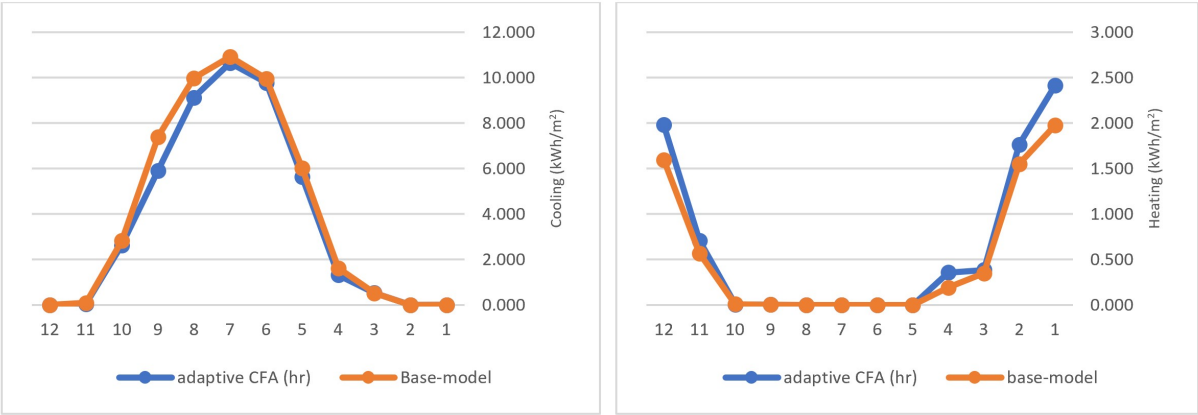












Fig. 14. Heating and cooling Comparison in an adaptive CFA(X-axis) and base-model.

Table 14. Daylight simulation for adaptive CFA (X-axis).

| Month       | Simulation                                                                          | sDA    | ASE     | Month  | Simulation                                                                            | sDA    | ASE   |
|-------------|-------------------------------------------------------------------------------------|--------|---------|--------|---------------------------------------------------------------------------------------|--------|-------|
| Feb         |    | 26.190 | 15.35   | Aug    |    | 21.685 | 3.63  |
| Apr         |    | 29.927 | 8.99    | Sep    |    | 26.227 | 6.63  |
| Mar         |   | 22.198 | 14.36   | Oct    |   | 29.835 | 8.99  |
| May         |  | 30.751 | 10.64   | Nov    |  | 26.099 | 15.35 |
| Jun         |                                                                                     |        |         | Dec    |  | 30.018 | 15.7  |
| Jul         |                                                                                     |        |         | Jan    |  | 27.93  | 15.57 |
| index       | sDA                                                                                 | ASE    | average | sDA    | ASE                                                                                   |        |       |
| Summer mode | 27.06%                                                                              | 9.42%  |         | 27.69% | 11.37%                                                                                |        |       |
| Winter mode | 28.33%                                                                              | 13.33% |         |        |                                                                                       |        |       |

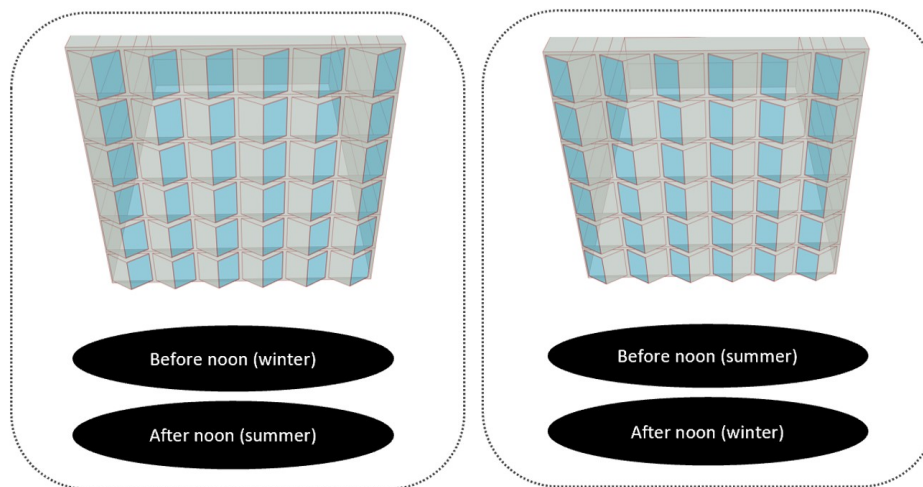


Fig. 15. Seasonal modes of CFA (Y-axis).

Table 15. EUI in adaptive CFA (Y-axis) (kWh/m<sup>2</sup>).

| Month | Cooling | Heating | lighting | Opening position |
|-------|---------|---------|----------|------------------|
| Jan   | 0.000   | 2.439   | 0.588    | B.N (east)       |
| Feb   | 0.000   | 1.736   | 0.531    | A.N (west)       |
| Mar   | 0.382   | 0.370   | 0.578    |                  |
| Apr   | 1.420   | 0.322   | 0.587    | B.N (west)       |
| May   | 5.713   | 0.000   | 0.632    | A.N (east)       |
| Jun   | 9.578   | 0.000   | 0.656    |                  |
| Jul   | 10.518  | 0.000   | 0.668    |                  |
| Aug   | 9.223   | 0.000   | 0.614    |                  |
| Sep   | 6.316   | 0.001   | 0.554    |                  |
| Oct   | 2.107   | 0.004   | 0.563    | B.N(east)        |
| Nov   | 0.027   | 0.659   | 0.592    | A.N (west)       |
| Dec   | 0.000   | 1.958   | 0.610    |                  |
| Total | 45.284  | 7.488   | 7.173    | 59.946           |

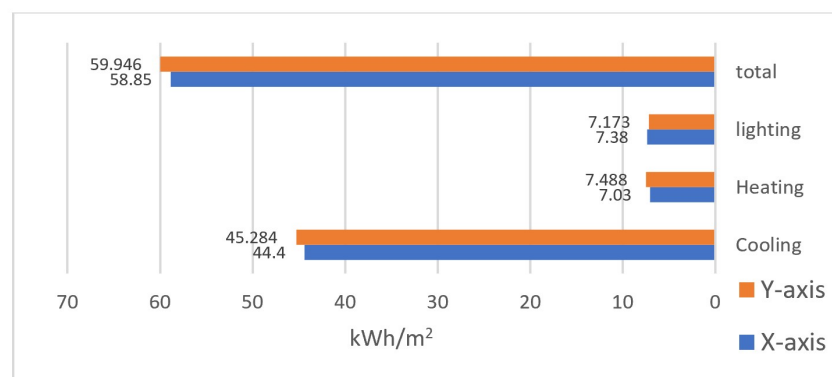


Fig. 16. CFA models energy usage comparison.

*first mode:* Active in the morning until before noon during frigid seasons, the upper and eastern apertures are strategically designed to allow direct sunlight to access the space during the day, thereby minimizing the requirement for heating. *Second mode:* Upper and western openings are open for operation in the afternoons of cold seasons.

*Third mode:* Openings at the bottom and east are active, which is specifically for use in the afternoons of warm seasons so that sunlight enters space indirectly during the day and reduces cooling consumption.

*Fourth mode:* Openings are active in the bottom and west, which is special for the morning to before noon in warm seasons and reduces direct sunlight into space (Fig. 17).

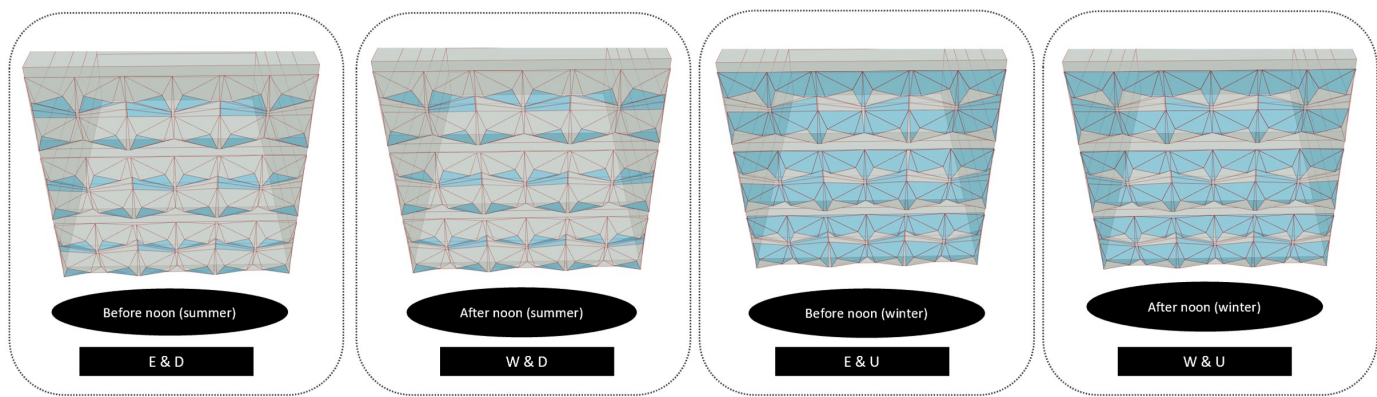


Fig. 17. Opening location during a year in an adaptive CPG model.

#### 4.4.1. Energy simulation

For this purpose, two different geometric patterns were modeled and simulated with different angles (Figs. 18 and 19)

Based on Table 16, the energy consumption in type 2 is far better than type 1, so focusing on this pattern and based on previously obtained information, different angles, and fractures in this template (type 2) were simulated and analyzed. Eventually, the optimal possible model is presented in Table 17:

Using this strategy cooling load will be reduced by about 13.05%, the heating load will be increased by 2.72%, and lighting by 32.84%. EUI will be decreased by 5.04 %.

#### 4.4.2. Daylight simulation

In light of the recent climate changes that have affected Mashhad, the cooling burden is of critical importance. Although this shell effectively mitigates cooling burdens, it is not suitable for the illumination environment. Based on LEED standard, the SDA should be above 50%, but as seen in Table 18, it's not in the recommended range.

### 5. Discussion

Today, climate change, environmental problems, and the increase in energy consumption in the building sector to meet the needs of residents have become significant challenges for most countries. Using bioclimatic architecture to address these climate changes and simultaneously increase efficiency is one of the most important and efficient methods in this area. Therefore, the results of this research are crucial as they help designers and architects select appropriate techniques for designing facades compatible with their climate in the early stages of the design process. They can choose the methods categorized in this research by understanding the climatic needs and changes.

To choose one of the method options for movement strategies in CABEs design for BSk Climate, the annual consumption is compared with each other for each solution. By comparing all the methods of CABE designing based on movement, CSA (HR) will have the lowest EUI of 56.023 (kWh.m<sup>2</sup>), and the CFA (Y-axis) will have the highest consumption of 59.946 (kWh.m<sup>2</sup>). The CPG has the lowest efficacy in terms of illumination energy consumption (7.901 kWh.m<sup>2</sup>) compared to the CSA (VR) (6.055 kWh.m<sup>2</sup>). The COP technique requires less heating energy by 6.229 kWh.m<sup>2</sup> usages per year, whereas the CSA (VR) method requires more (7.547 kWh.m<sup>2</sup>). The largest consumer in the BSK

climate, cooling, is utilized extensively in the COP method (45.492 kWh.m<sup>2</sup>) but less so in the CSA (HR) method (42.377 kWh.m<sup>2</sup>). No method has reduced all parameters of cooling, heating, and lighting at the same time, so one of these methods cannot be used as the best solution for designing a CABE. Therefore, an integrated model that is a combination of several methods can be used as the best solution.

Overall, the cooling energy usage will be reduced by 7.67% (COP), 14% (CSA-hr), 9.72% (CSA-vr), 9.82% (CFA X-axis), 8.10% (CFA Y-axis), and 13.05% (CPG) with these strategies. In terms of heating load, different results were obtained and only by

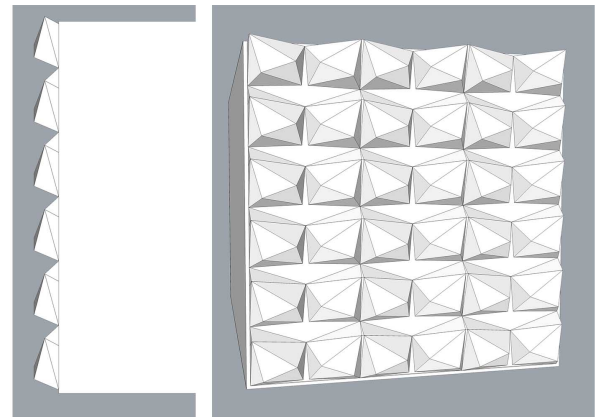


Fig. 18. Repeat monotone module (Type1).

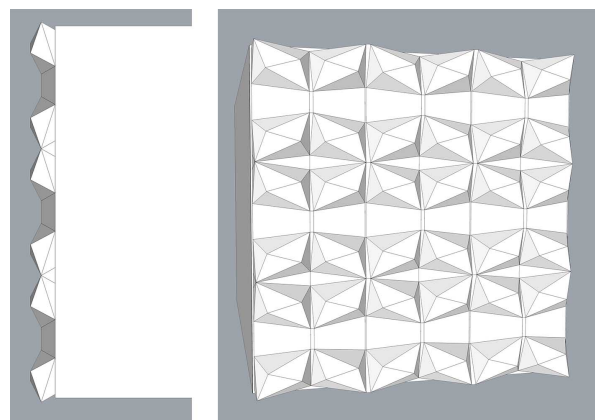


Fig. 19. Repeat reverse modules (Type 2).

**Table 16.** Energy consumption in two models of the CPG.

| Types  |       | Cooling | Heating | lighting | Total  |
|--------|-------|---------|---------|----------|--------|
| Type 1 | U & E | 52.919  | 7.546   | 5.413    | 65.878 |
|        | U & W | 52.926  | 7.556   | 5.375    | 65.857 |
|        | D & E | 45.736  | 8.568   | 7.364    | 61.668 |
|        | D & W | 45.621  | 8.559   | 7.568    | 61.748 |
| Type 2 | U & E | 45.919  | 6.431   | 5.251    | 57.601 |
|        | U & W | 45.926  | 6.446   | 5.136    | 57.508 |
|        | D & E | 38.628  | 7.769   | 6.876    | 53.273 |
|        | D & W | 38.513  | 7.559   | 6.976    | 53.048 |

**Table 17.** EUI of the adaptive CPG model (kWh/m<sup>2</sup>).

| Month | Cooling | Heating | lighting | Opening place |
|-------|---------|---------|----------|---------------|
| Jan   | 0.000   | 2.216   | 0.480    | U & E         |
| Feb   | 0.000   | 1.764   | 0.415    | U & W         |
| Mar   | 0.000   | 0.383   | 0.436    |               |
| Apr   | 1.012   | 0.356   | 0.851    | D & E         |
| May   | 5.639   | 0.000   | 0.890    | D & W         |
| Jun   | 9.643   | 0.000   | 0.867    |               |
| Jul   | 10.341  | 0.000   | 0.898    |               |
| Aug   | 9.026   | 0.000   | 0.874    |               |
| Sep   | 5.912   | 0.001   | 0.773    |               |
| Oct   | 2.013   | 0.000   | 0.439    | U & E         |
| Nov   | 0.000   | 0.306   | 0.474    | U & W         |
| Dec   | 0.000   | 1.379   | 0.503    |               |
| Total | 43.586  | 6.405   | 7.901    | 57.892        |

using COP, did the amount of energy consumption decrease by 3.75%. But by using other solutions, the amount of heating load will increase between 2.72% (CPG) and 21.12% (CSA-vr).

Using all methods, the daylight efficiency increased compared with 80% OP (fixed) as the base model. Since the contribution of the cooling load is higher in the studied climate, using solutions that can further reduce the cooling load is much more recommended such as (CSA-hr), (CPG), and (CFA X-axis).

Recent research on climate-adaptive building envelopes (CABEs) has demonstrated various strategies to optimize energy performance and daylighting in different climatic conditions. This section compares the findings of our study with those from recent publications to highlight similarities and differences in CABE performance.

A study on adaptive facades by [32] emphasized the balance between energy performance and indoor environmental quality across various climates. Their findings indicated that dynamic shading devices significantly reduced energy consumption while enhancing occupant comfort. Our COP-CSA integrated model showed similar effectiveness, achieving a 4–8% reduction in Energy Usage Intensity (EUI) and improving daylight autonomy, which aligns with their results.

In the other climates of Iran, Talaei et al. (2024) [63] focused on strategies like exterior shading systems and passive design strategies. Although in this research, a fixed system was used for shading, the amount of consumption has been reduced by optimizing the dimensions and proportions. both studies reported substantial energy savings through adaptive shadings. Specifically,





our study found that implementing a CSA(HR) intelligent system reduced cooling demand by 14%, comparable to their results in reducing energy consumption.

Another study [64] compared various dynamic shading systems and their impact on energy performance, highlighting rotating overhangs as the most efficient solution. These overhangs demonstrated substantial energy savings and were found to be effective and easily controllable under different design and operational conditions. The findings for the BSk climate in the USA showed similar results to this research, achieving a 19% energy reduction for a WWR of 15% and a 31% reduction for a WWR of 30%. The primary differences between this study and the current research are the percentage of opening and the angle of rotation of the overhang. Nevertheless, both studies identified the use of overhanging shades as the optimal strategy.

Research by [65] on CABEs highlighted the importance of adaptive facades in mitigating extreme temperatures. Our findings support this, showing that the CSA strategy provided significant cooling load reduction and improved summer conditions, corroborating their emphasis on adaptive solutions for thermal comfort.

[66] analyzed kinetic facades for energy efficiency in hot dry climates, akin to Mashhad's summers, noting their impact on visual and indoor comfort. Our study's CFA method, which incorporates changes in shading angles and pattern geometry, demonstrated similar benefits, underscoring the potential of kinetic facades to enhance energy performance.

Table 18. Annual daylight simulation (CPG).

| Month                                  | Simulation                                                                         | sDA   | ASE    | position     |
|----------------------------------------|------------------------------------------------------------------------------------|-------|--------|--------------|
| Jun<br>Feb<br>Mar<br>Oct<br>Nov<br>Dec |   | 17.33 | 10.19  | U & E<br>B.N |
|                                        |   | 16.95 | 8.41   | U & W<br>A.N |
| Apr<br>Mar<br>Jun<br>Jul<br>Aug<br>Sep |   | 14.66 | 5.83   | D & E<br>A.N |
|                                        |  | 13.70 | 5.62   | D&W<br>B.N   |
| sDA average                            |                                                                                    |       | 15.66% |              |
| ASE average                            |                                                                                    |       | 7.51%  |              |

Finally, Francesco De Luca, Hendrik Voll, and Martin Thalfeldt (2018) compared static and dynamic shading systems for office building energy consumption and cooling load assessment. Their study demonstrated that dynamic shading systems, such as rotating overhangs, significantly reduce cooling loads and overall energy consumption in office buildings. The findings showed that dynamic shading can outperform static systems, providing a more uniform and effective solution for controlling energy use, especially in varied operational scenarios [67]. Their results, which indicated substantial reductions in cooling loads, parallel our findings where the CSA(HR) system achieved notable cooling energy savings, highlighting the efficacy of dynamic shading in office environments.

The unique aspect of this research compared to others is its classification of different movement strategies in CABEs and their comparison using a simplified model to identify the most effective method for such climates. This approach, which has not been employed in other studies, allows for a systematic evaluation to determine the best strategy for climate adaptation.

By comparing these studies, it is evident that our research on climate-adaptive building envelopes for Mashhad's cold semi-arid climate aligns with global trends in optimizing energy performance and occupant comfort through adaptive strategies. The COP-CSA integrated model, in particular, emerges as a versatile and effective solution, demonstrating the potential of CABEs in diverse climatic conditions.

One of the shortcomings of this research is the lack of focus on thermal comfort as an independent measurement index alongside cooling, heating, and lighting loads, as well as visual comfort. This limitation can be addressed in future studies by evaluating these factors through a multi-objective optimization project.

There were limitations in selecting the geometries used in the CPG model. Additionally, in the CFA model, more complex designs could have been considered; however, for simplicity and comparison purposes, the most straightforward designs were chosen.

Therefore, future research will address the inclusion and optimization of all geometry types, considering increasingly comprehensive objective functions.

## 6. Conclusions

Using CABEs for the city of Mashhad, with cold winters, and hot-dry summers, can be a suitable solution for controlling and adapting the building to the environment, and enhancing the comfort parameters simultaneously.

Considering BSK climate condition, it is necessary to implement solutions that reduce heating consumption; therefore, transitioning to OP, which reduces heating by 3.75 percent, is the most effective. However, surveys indicate that unbearable temperatures have increased cooling demands in recent years. Implementing a CSA(HR) intelligent system on the facade can therefore be a simple, cost-effective, and effective solution for office facades. Due to having the maximum opening and taking advantage of the light and heat of sun in cold winters, it brought better conditions for summers as well. This method has a prominent performance to reduce the cooling by 14% and 7.90% of EUI. It can be chosen as the best way in CABE's design for Mashhad. But, it's not good for reducing the heating load. Therefore, the integrated model of COP and CSA can be the best method which has good efficiency in heating and cooling load with EUI reduction between 4–8% according to design parameters.

In the next step, it is possible to introduce a CABE with the method of using patterns as one of the most efficient solutions in this climate. A fracture pattern is based on X and Y axes and the location of opening changes according to the season and the daytime. Two mentioned methods are the most efficient ones.

The last method (CPG) has a reduction of 5.04 % in EUI, and 13.05% in cooling, but the weakness is increasing lighting and heating consumption. Therefore, it is recommended to use a solution of COP incorporated with an optimized fracture façade.

The result of daylight performance in the two top methods was compared. The CSA(HR) has better efficiency than CPG, but there is less possibility of glare in the CPG. Daylight efficacy has decreased in the two models with the lowest energy consumption, as indicated by daylight indicators, in comparison to the basic model. Nevertheless, given the substantial reduction in cooling burden, it is reasonable to anticipate that the implementation of solutions may partially mitigate this issue. In general, it can be concluded that using each of the methods categorized in this research solely is not suitable for BSK climates, and to respond simultaneously to energy and light efficiency factors, combined and integrated methods should be used.

By considering other factors, such as layout proportions, type and size of glazing, and shading materials in the CSA, the light efficiency & glare control can be increased simultaneously. The ideal shell design for an office building is influenced by a number of elements, including economic considerations, maintenance and expense considerations, simplicity of execution, and aesthetic considerations. Therefore, more research can be done to determine the best geometric pattern as an integrated method for designing facades responsive to the climate.

## Contributions

H.G.H. developed the main topic, performed the modeling and simulation work, and prepared the initial draft. M.T. checked the analyses, reviewed the final results, and revised the draft.

## Declaration of competing interest

The authors declare no conflict of interest.

## References

- [1] S. Khabir, R. Vakilinezhad, Energy and thermal analysis of DSF in the retrofit design of office buildings in hot climates, *Architectural Engineering and Design Management* 19 (2023) 642–664.
- [2] M. Santamouris, K. Vasilakopoulou, Present and future energy consumption of buildings: Challenges and opportunities towards decarbonisation, *E-Prime - Advances in Electrical Engineering, Electronics and Energy* 1 (2021) 100002.
- [3] H.S. Ju, Z. Qing, Virtual Simulation Technology Research of Energy Saving Building, *Information Technology Journal* 12 (2014) 7922–7925.
- [4] A. Guimarães, E. Naud, J. Pires, P. Muza, R. Climaco, Principles and tools for bioclimatic building design - an applied review and analysis in cold climates, 4196–4203 3 (2017) 4749–4756. <https://ntnuopen.ntnu.no/ntnu-xmlui/handle/11250/2490784> (accessed June 10, 2024).
- [5] E.I. Aghimien, D.H.W. Li, E.K.W. Tsang, Bioclimatic architecture and its energy-saving potentials: a review and future directions, *Engineering, Construction and Architectural Management* 29 (2022) 961–988.
- [6] F. Fantozzi, H. Hamdi, M. Rocca, S. Vegnuti, Use of Automated Control Systems and Advanced Energy Simulations in the Design of Climate Responsive Educational Building for Mediterranean Area, *Sustainability* 11 (2019) 1660.
- [7] L. Pastore, M. Andersen, The influence of façade and space design on building occupants' indoor experience, *Journal of Building Engineering* 46 (2022) 103663.
- [8] A. Aksamija, Foreword, *Rethinking Building Skins: Transformative Technologies and Research Trajectories* (2022) xv–xvi.
- [9] R.C.G.M. Loonen, M. Trčka, D. Cóstola, J.L.M. Hensen, Climate adaptive building shells: State-of-the-art and future challenges, *Renewable and Sustainable Energy Reviews* 25 (2013) 483–493.
- [10] B. de BJ, Gerrit Jan Ruijg, R. loonen, M. Trčka, J. hensen, wim Kornaat, Climate adaptive building shells for the future-optimization with an inverse modelling approach, in: *In Proceedings ECEEE Summer Study 2011*, 2011: pp. 1413–1422. [www.tue.nl/taverne](http://www.tue.nl/taverne) (accessed September 9, 2023).
- [11] E. Kızılörenli, F. Maden, Modular responsive facade proposals based on semi-regular and demi-regular tessellation: daylighting and visual comfort, *Frontiers of Architectural Research* 12 (2023) 601–612.
- [12] M.S. Naddaf, S.Y. Baper, The role of double-skin facade configurations in optimizing building energy performance in Erbil city, *Sci Rep* 13 (2023).
- [13] M. Gholami Rostam, A. Abbasi, Dynamic climate-adaptive design: A key to realizing future-proof energy efficiency in building sector, *Appl Energy* 341 (2023) 121146.
- [14] D.K. Bui, T.N. Nguyen, A. Ghazlan, N.T. Ngo, T.D. Ngo, Enhancing building energy efficiency by adaptive façade: A computational optimization approach, *Appl Energy* 265 (2020).
- [15] S. Attia, R. Lioure, Q. Declaude, Future trends and main concepts of adaptive facade systems, *Energy Sci Eng* 8 (2020) 3255–3272.
- [16] S. Attia, S. Bilir, T. Safy, C. Struck, R. Loonen, F. Goia, Current trends and future challenges in the performance assessment of adaptive façade systems, *Energy Build* 179 (2018) 165–182.
- [17] X. Shi, T. Abel, L. Wang, Influence of two motion types on solar transmittance and daylight performance of dynamic façades, *Solar Energy* 201 (2020) 561–580.
- [18] S. Samadi, E. Noorzai, L.O. Beltrán, S. Abbasi, A computational approach for achieving optimum daylight inside buildings through automated kinetic shading systems, *Frontiers of Architectural Research* 9 (2020) 335–349.
- [19] B. Kahramanoğlu, N. Çakıcı Alp, Enhancing visual comfort with Miura-ori-based responsive facade model, *Journal of Building Engineering* 69 (2023) 106241.
- [20] A. Tabadkani, A. Roetzel, H.X. Li, A. Tsangrassoulis, Design approaches and typologies of adaptive facades: A review, *Autom Constr* 121 (2021) 103450.

- [21] W. Zhang, Smart Building Skin Design with Dynamic Climate Adaptability of Smart Cities Based on Artificial Intelligence, *Advances in Multimedia* 2023 (2023) 1-12.
- [22] S.M. Hosseini, M. Mohammadi, O. Guerra-Santin, Interactive kinetic façade: Improving visual comfort based on dynamic daylight and occupant's positions by 2D and 3D shape changes, *Build Environ* 165 (2019) 106396.
- [23] J. Böke, U. Knaack, M. Hemmerling, State-of-the-art of intelligent building envelopes in the context of intelligent technical systems, *Intelligent Buildings International* 11 (2019) 27-45.
- [24] M.P. Voigt, K. Chwalek, D. Roth, M. Kreimeyer, L. Blandini, The integrated design process of adaptive façades - A comprehensive perspective, *Journal of Building Engineering* 67 (2023) 106043.
- [25] M. Matheou, A. Couvelas, M.C. Phocas, Transformable building envelope design in architectural education, *Procedia Manuf* 44 (2020) 116-123.
- [26] E. Sorooshnia, P. Rahnamayiezekavat, M. Rashidi, M. Sadeghi, B. Samali, Passive Intelligent Kinetic External Dynamic Shade Design for Improving Indoor Comfort and Minimizing Energy Consumption, *Buildings* 2023, Vol. 13, Page 1090 13 (2023) 1090.
- [27] Y. Zhang, W. Wulff, L. Wernicke, M. Engelmann, T. Schauer, A. Bleicher, Experimental identification and verification of a moveable facade element for energy harvesting and vibration control, *Journal of Building Engineering* 65 (2023) 105712.
- [28] P. de Wilde, W. Tian, The role of adaptive thermal comfort in the prediction of the thermal performance of a modern mixed-mode office building in the UK under climate change, 3 (2010) 87-101.
- [29] S. Mirrahimi, M.F. Mohamed, L.C. Haw, N.L.N. Ibrahim, W.F.M. Yusoff, A. Aflaki, The effect of building envelope on the thermal comfort and energy saving for high-rise buildings in hot-humid climate, *Renewable and Sustainable Energy Reviews* 53 (2016) 1508-1519.
- [30] R.C.G.M. Loonen, M. Trcka, J.L.M. Hensen, Exploring the potential of climate adaptive building shells, *Proceedings of Building Simulation 2011: 12th Conference of International Building Performance Simulation Association*, Sydney, Australia (2011) 2148-2155. <https://research.tue.nl/en/publications/exploring-the-potential-of-climate-adaptive-building-shells> (accessed November 13, 2023).
- [31] R.C.G.M. Loonen, F. Favoino, J.L.M. Hensen, M. Overend, Review of current status, requirements and opportunities for building performance simulation of adaptive facades†, *J Build Perform Simul* 10 (2017) 205-223.
- [32] X. Zhang, H. Zhang, Y. Wang, X. Shi, Adaptive Façades: Review of Designs, Performance Evaluation, and Control Systems, *Buildings* 12 (2022) 2112.
- [33] N. Heidari Matin, A. Eydgahi, Factors affecting the design and development of responsive facades: a historical evolution, *Intelligent Buildings International* 12 (2020) 257-270.
- [34] R. Baetens, B.P. Jelle, A. Gustavsen, Properties , Requirements and Possibilities of Smart Windows for Dynamic Daylight and Solar Energy Control in Buildings : State-of-the-Art, (2017).
- [35] V. Mathew, C. Pearl Kurian, N. Augustine, Climate-responsive machine learning-based control of switchable glazing towards human-centric lighting, *Solar Energy* 260 (2023) 49-60.
- [36] E. Field, A. Ghosh, Energy assessment of advanced and switchable windows for less energy-hungry buildings in the UK, *Energy* 283 (2023) 128999.
- [37] M.V. Nielsen, S. Svendsen, L.B. Jensen, Quantifying the potential of automated dynamic solar shading in office buildings through integrated simulations of energy and daylight, *Solar Energy* 85 (2011) 757-768.
- [38] M.C. Pinto, G. Crespi, F. Dell'Anna, C. Becchio, Combining energy dynamic simulation and multi-criteria analysis for supporting investment decisions on smart shading devices in office buildings, *Appl Energy* 332 (2023) 120470.
- [39] F. Kuznik, D. David, K. Johannes, J.J. Roux, A review on phase change materials integrated in building walls, *Renewable and Sustainable Energy Reviews* 15 (2011) 379-391.
- [40] P. Wang, Z. Liu, X. Zhang, M. Hu, L. Zhang, J. Fan, Adaptive dynamic building envelope integrated with phase change material to enhance the heat storage and release efficiency: A state-of-the-art review, *Energy Build* 286 (2023) 112928.
- [41] M. Kimber, W.W. Clark, L. Schaefer, Conceptual analysis and design of a partitioned multifunctional smart insulation, *Appl Energy* 114 (2014) 310-319.
- [42] Z. Zhang, N. Zhang, Y. Yuan, P.E. Phelan, S. Attia, Thermal performance of a dynamic insulation-phase change material system and its application in multilayer hollow walls, *J Energy Storage* 62 (2023) 106912.
- [43] F. Favoino, F. Goia, M. Perino, V. Serra, Experimental assessment of the energy performance of an advanced responsive multifunctional façade module, *Energy Build* 68 (2014) 647-659.
- [44] M.E. Soliman, S. Bo, An innovative multifunctional biomimetic adaptive building envelope based on a novel integrated methodology of merging biological mechanisms, *Journal of Building Engineering* 76 (2023) 106995.
- [45] A. Luna-Navarro, R. Loonen, M. Juaristi, A. Monge-Barrio, S. Attia, M. Overend, Occupant-Facade interaction: a review and classification scheme, *Build Environ* 177 (2020) 106880.
- [46] C. Kasinalis, R.C.G.M. Loonen, D. Cóstola, J.L.M. Hensen, Framework for assessing the performance potential of seasonally adaptable facades using multi-objective optimization, *Energy Build* 79 (2014) 106-113.
- [47] S.M. Hosseini, M. Mohammadi, T. Schröder, O. Guerra-Santin, Integrating interactive kinetic façade design with colored glass to improve daylight performance based on occupants' position, *Journal of Building Engineering* 31 (2020) 101404.
- [48] L. Le-Thanh, T. Le-Duc, H. Ngo-Minh, Q.H. Nguyen, H. Nguyen-Xuan, Optimal design of an Origami-inspired kinetic façade by balancing composite motion optimization for improving daylight performance and energy efficiency, *Energy* 219 (2021) 119557.
- [49] S. Preto, Dynamic Façades: Optimization of Natural Light at Workplaces, *Advances in Intelligent Systems and Computing* 966 (2020) 392-402.
- [50] J. sedlak, M. Kalousek, energy saving solar facade for non-residential buildings for climatic condition in the czech republic, (2001). [https://www.researchgate.net/publication/228519643\\_energy\\_saving\\_solar\\_facade\\_for\\_non-residential\\_buildings\\_for\\_climatic\\_condition\\_in\\_the\\_czech\\_republic/figures?lo=1&utm\\_source=google&utm\\_medium=organic](https://www.researchgate.net/publication/228519643_energy_saving_solar_facade_for_non-residential_buildings_for_climatic_condition_in_the_czech_republic/figures?lo=1&utm_source=google&utm_medium=organic) (accessed October 18, 2023).
- [51] A. Sezege, Y. Aksoy, Investigation of the adaptive facade concepts in terms of shading elements, (2019).
- [52] H.S.M. Shahin, Adaptive building envelopes of multistory buildings as an example of high performance building skins, *Alexandria Engineering Journal* 58 (2019) 345-352.
- [53] C.F. Reinhart, O. Walkenhorst, Validation of dynamic RADIANCE-based daylight simulations for a test office with external blinds, *Energy Build* 33 (2001) 683-697.
- [54] F. Kharvari, An empirical validation of daylighting tools: Assessing radiance parameters and simulation settings in Ladybug and Honeybee against field measurements, *Solar Energy* 207 (2020) 1021-1036.
- [55] M. Talaei, M. Mahdavejad, R. Azari, A. Prieto, H. Sangin, Multi-objective optimization of building-integrated microalgae photobioreactors for energy and daylighting performance, *Journal of Building Engineering* 42 (2021) 102832.
- [56] P. Hoseinzadeh, M. Khalaji Assadi, S. Heidari, M. Khalatbari, R. Saidur, K. Haghighat nejad, H. Sangin, Energy performance of building integrated photovoltaic high-rise building: Case study, Tehran, Iran, *Energy Build* 235 (2021) 110707.
- [57] D.S. Lee, S.H. Koo, Y.B. Seong, J.H. Jo, Evaluating Thermal and Lighting Energy Performance of Shading Devices on Kinetic Façades, *Sustainability* 2016, Vol. 8, Page 883 8 (2016) 883.
- [58] P. Pilechiha, M. Mahdavejad, F. Pour Rahimian, P. Carnemolla, S. Seyedzadeh, Multi-objective optimisation framework for designing office windows: quality of view, daylight and energy efficiency, *Appl Energy* 261 (2020) 114356.
- [59] Q. Li, J. Haberl, Prediction of Annual Daylighting Performance Using Inverse Models, *Sustainability (Switzerland)* 15 (2023).
- [60] IES LM-83-12 Approved Method: IES Spatial Daylight Autonomy (sDA) and Annual Sunlight Exposure (ASE), (2012).
- [61] A. Addenda, Specifying Direct Digital Control Systems, (2000). [www.ashrae.org](http://www.ashrae.org) (accessed April 28, 2023).
- [62] F. Rezaei, H. Sangin, M. Heiranipour, S. Attia, A Multi-objective Optimization of Window and Light Shelf Design in Office Buildings to Improve Occupants' Thermal and Visual Comfort, *Journal of Daylighting* 11 (2024) 55-68.
- [63] M. Talaei, H. Sangin, Multi-objective optimization of energy and daylight performance for school envelopes in desert, semi-arid, and mediterranean climates of Iran, *Build Environ* 255 (2024) 111424.
- [64] M. Krarti, A Comparative Energy Analysis of Dynamic External Shadings for Office Buildings, *Journal of Engineering for Sustainable Buildings and Cities* 3 (2022).
- [65] J. Gaspari, E. Naboni, C. Ponzio, A. Ricci, A Study on the Impact of Climate Adaptive Building Shells on Indoor Comfort, *Journal of Facade Design and Engineering* 7 (2019) 27-40.

- [66] C. Ben bacha, F. Bourbia, Effect of kinetic façades on energy efficiency in office buildings - hot dry climates, in: 11th Conference on Advanced Building Skins, 2016. <https://oaktrust.library.tamu.edu/handle/1969.1/158209> (accessed June 12, 2024).
- [67] F. De Luca, H. Voll, M. Thalfeldt, Comparison of static and dynamic shading systems for office building energy consumption and cooling load assessment, *Management of Environmental Quality: An International Journal* 29 (2018) 978-998.